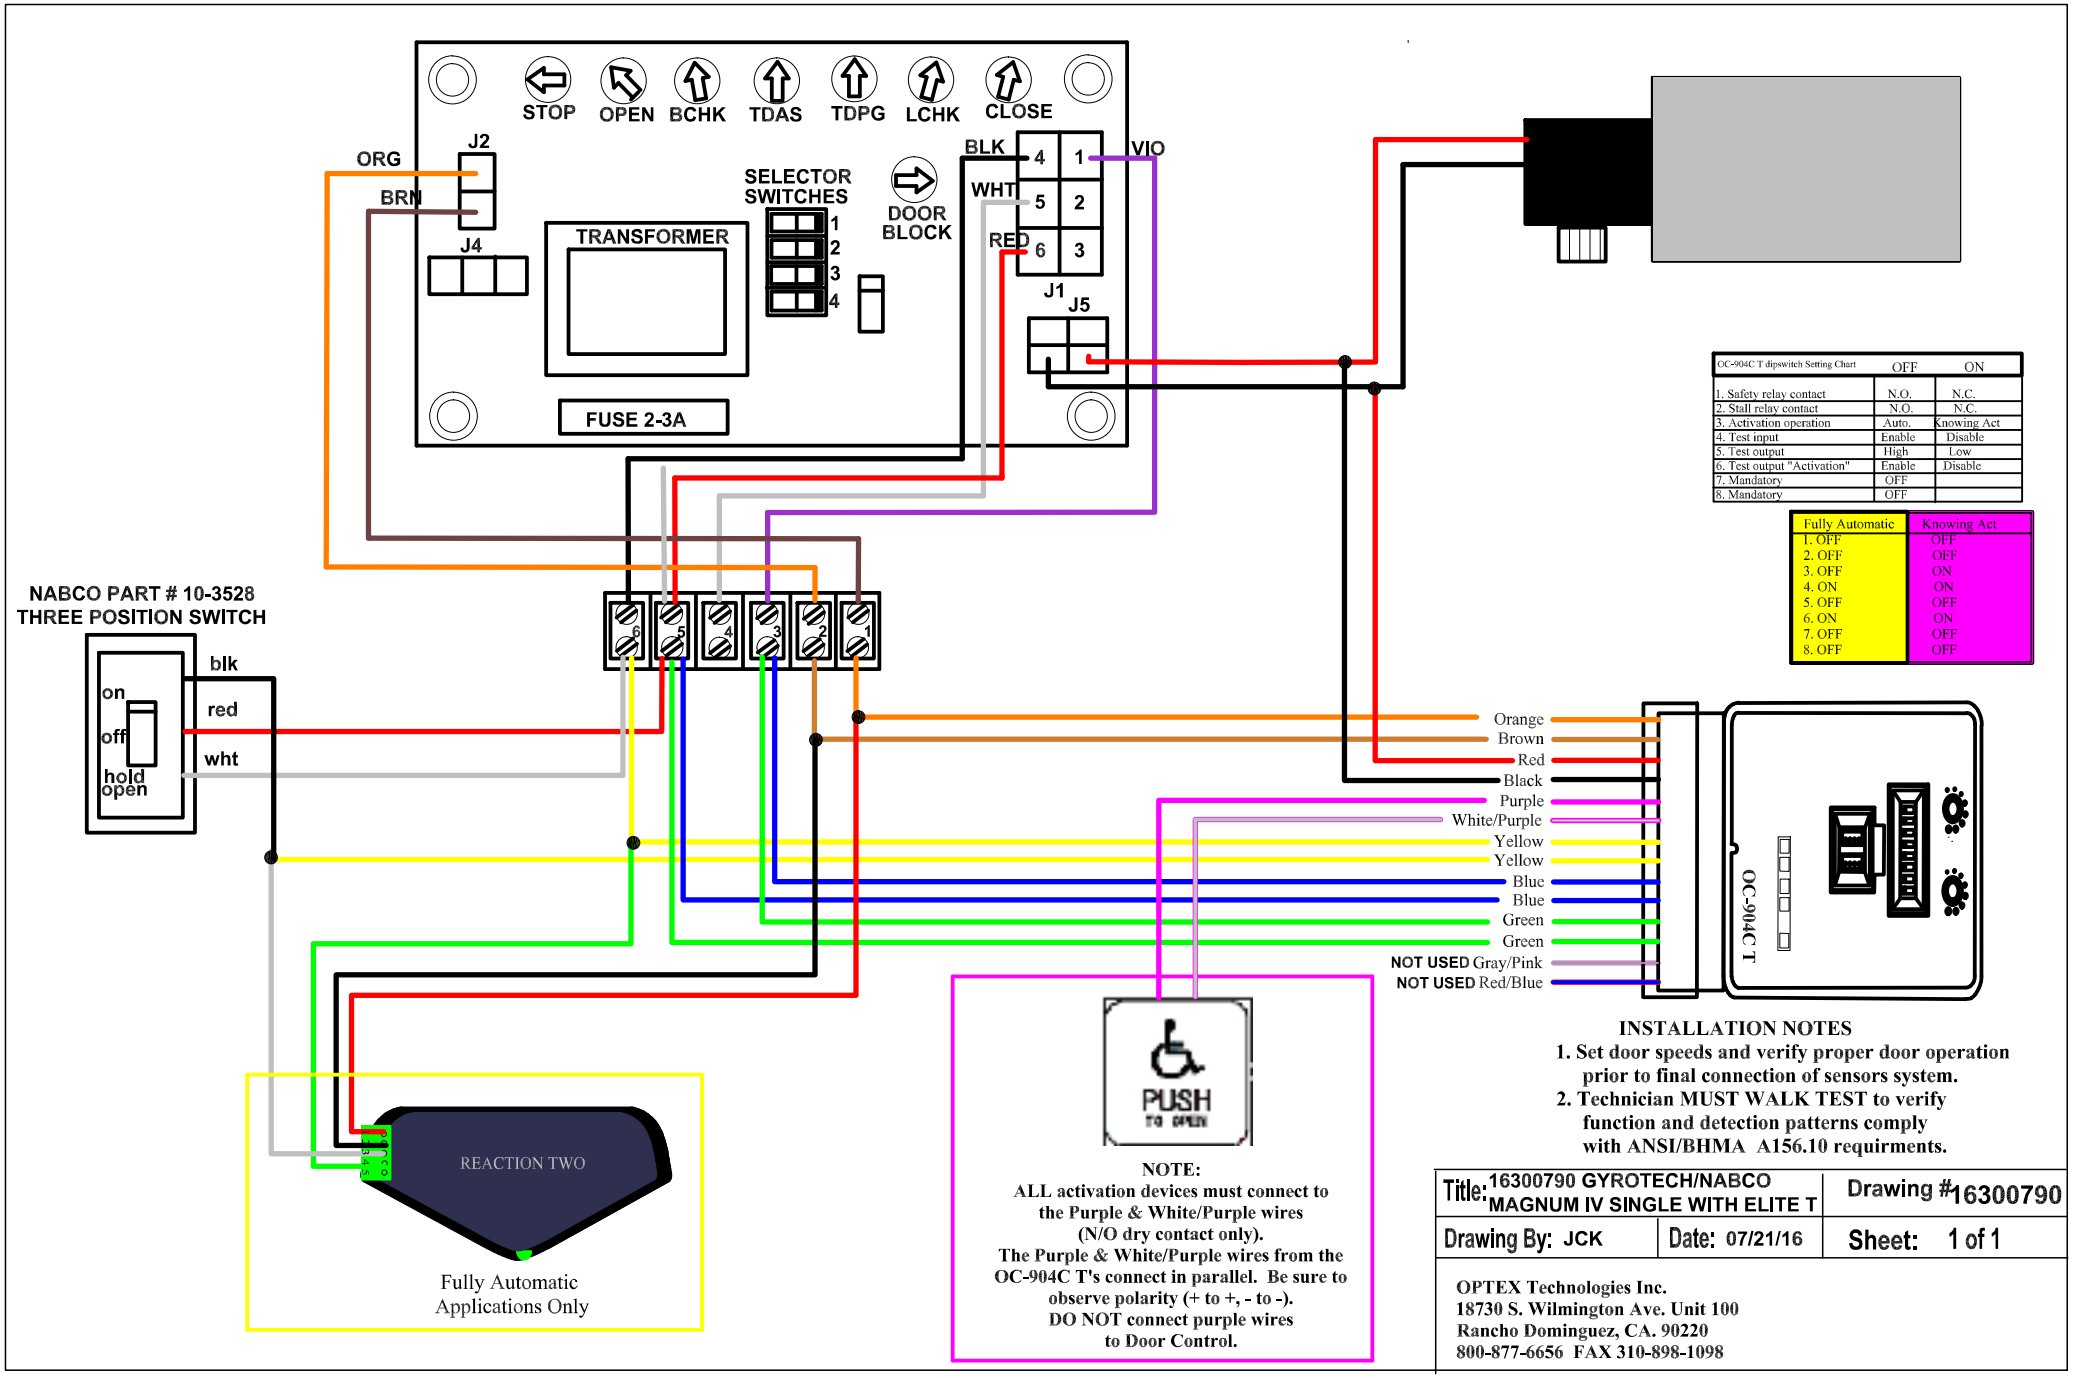

OC-904C T dipswitch Setting Chart	OFF	ON
1. Safety relay contact	N.O.	N.C.
2. Stall relay contact	N.O.	N.C.
3. Activation operation	Auto.	Knowing Act
4. Test input	Enable	Disable
5. Test output	High	Low
6. Test output "Activation"	Enable	Disable
7. Mandatory	OFF	
8. Mandatory	OFF	

Fully Automatic	Knowing Act
1. OFF	OFF
2. OFF	OFF
3. OFF	ON
4. ON	ON
5. OFF	OFF
6. ON	ON
7. OFF	OFF
8. OFF	OFF

INSTALLATION NOTES

1. Set door speeds and verify proper door operation prior to final connection of sensors system.
2. Technician MUST WALK TEST to verify function and detection patterns comply with ANSI/BHMA A156.10 requirments.

Title: 16300790 GYROTECH/NABCO MAGNUM IV SINGLE WITH ELITE T		Drawing # 16300790
Drawing By: JCK	Date: 07/21/16	Sheet: 1 of 1

OPTEX Technologies Inc.
18730 S. Wilmington Ave. Unit 100
Rancho Dominguez, CA. 90220
800-877-6656 FAX 310-898-1098