NOTE:
ALL activation devices must connect to the Purple & White/Purple wires (N/O dry contact only).
The Purple & White/Purple wires from the OC-904C T's connect in parallel. Be sure to observe polarity (+ to +, - to -).
DO NOT connect purple wires to Door Control.

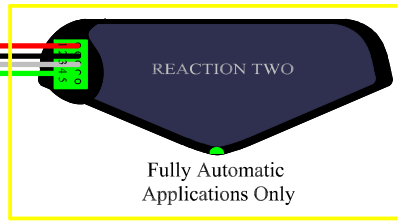

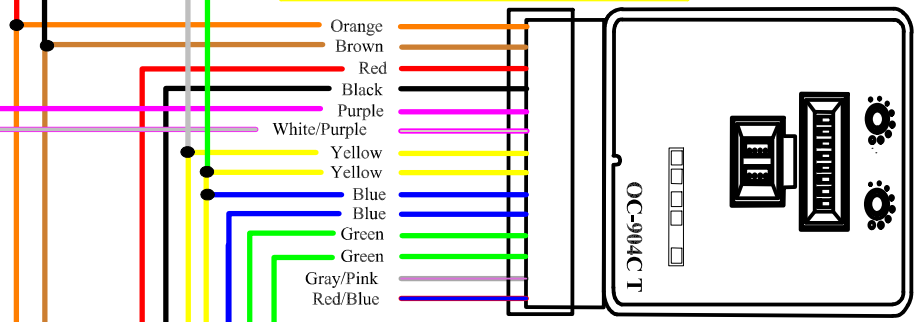

OC-904C T dipswitch Setting Chart	OFF	ON
1. Safety relay contact	N.O.	N.C.
2. Stall relay contact	N.O.	N.C.
3. Activation operation	Auto.	Knowing Act
4. Test input	Enable	Disable
5. Test output	High	Low
6. Test output "Activation"	Enable	Disable
7. Mandatory	OFF	
8. Mandatory	OFF	

Fully Automatic	Knowing Act
1. OFF	OFF
2. OFF	OFF
3. OFF	ON
4. ON	ON
5. OFF	OFF
6. ON	ON
7. OFF	OFF
8. OFF	OFF

NOTE: An alternate connection for the red and black wire from the OA-904 control is the red wire to the positive side of the motor with door in the open position and the black wire to the negivate side of the motor in the open position.



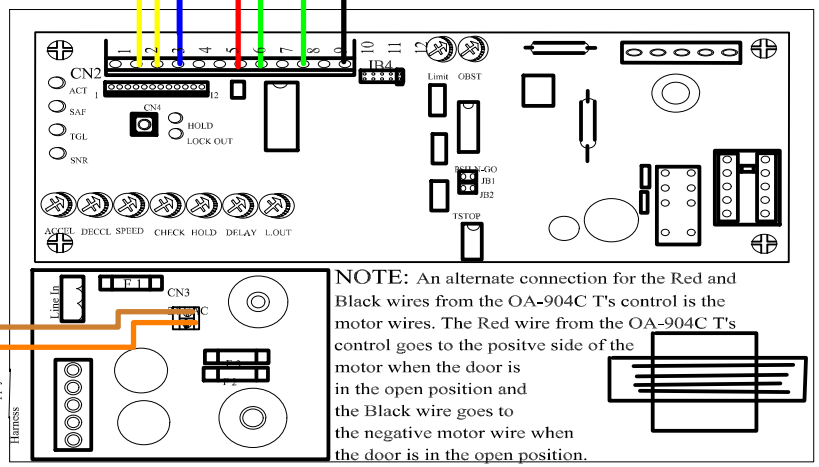

NOTE: An alternate connection for the Red and Black wires from the OA-904C T's control is the motor wires. The Red wire from the OA-904C T's control goes to the positve side of the motor when the door is in the open position and the Black wire goes to the negative motor wire when the door is in the open position.

INSTALLATION NOTES

1. **Set door speeds and verify proper door operation prior to final connection of sensors system.**
2. **Technician MUST WALK TEST to verify function and detection patterns comply with ANSI/BHMA A156.10 requirments.**

Title: 16300670 Horton4190 Rev J Single with Elite T	Drawing # 16300670
Drawing By: RNG Date: 09/16/17	Sheet: 1 of 1

OPTEX Technologies Inc.
18730 S. Wilmington Ave. Unit 100
Rancho Dominguez, CA. 90220
800-877-6656 FAX 310-898-1098