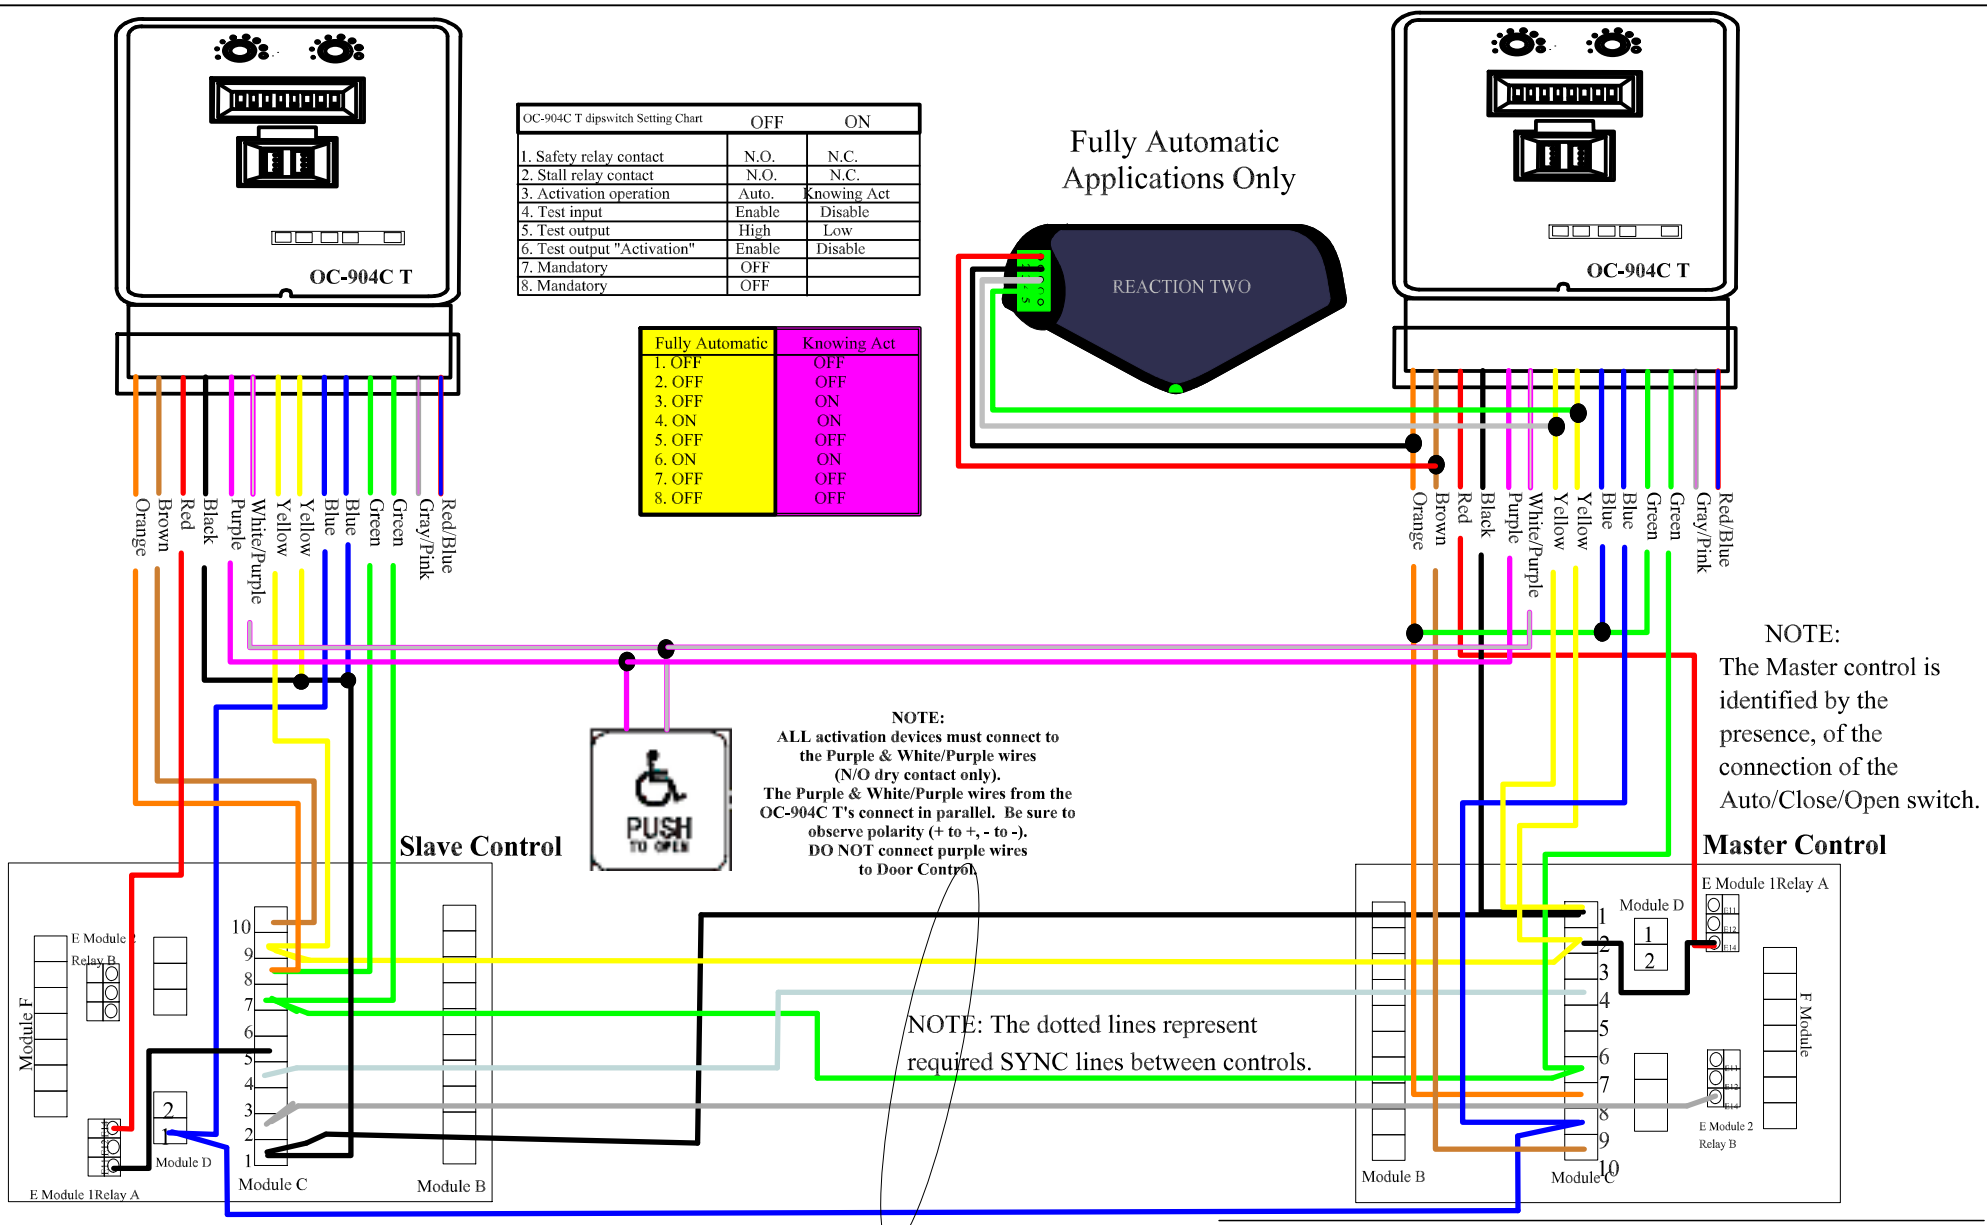

OC-904C T dipswitch Setting Chart	OFF	ON
1. Safety relay contact	N.O.	N.C.
2. Stall relay contact	N.O.	N.C.
3. Activation operation	Auto.	Knowing Act
4. Test input	Enable	Disable
5. Test output	High	Low
6. Test output "Activation"	Enable	Disable
7. Mandatory	OFF	
8. Mandatory	OFF	

Fully Automatic	Knowing Act
1. OFF	OFF
2. OFF	OFF
3. OFF	ON
4. ON	ON
5. OFF	OFF
6. ON	ON
7. OFF	OFF
8. OFF	OFF

NOTE:
ALL activation devices must connect to the Purple & White/Purple wires (N/O dry contact only).
The Purple & White/Purple wires from the OC-904C T's connect in parallel. Be sure to observe polarity (+ to +, - to -).
DO NOT connect purple wires to Door Control.

NOTE:
The Master control is identified by the presence, of the connection of the Auto/Close/Open switch.

NOTE: The dotted lines represent required SYNC lines between controls.

NOTE:
The activation and safety terminals, have different pin location on both the Master and Slave controls.

INSTALLATION NOTES

1. **Set door speeds and verify proper door operation prior to final connection of sensor system.**
2. **Technician MUST WALK TEST to verify function and detection patterns comply with ANSI/BHMA A156.10 requirments.**

Title: 16300960 TDA Pair with Elite		**Drawing #** 16300960
Drawing By: RNG	**Date:** 09/16/17	**Sheet:** 1 of 1

OPTEX Technologies Inc.
18730 S. Wilmington Ave. Unit 100
Rancho Dominguez, CA. 90220
800-877-6656 FAX 310-898-1098