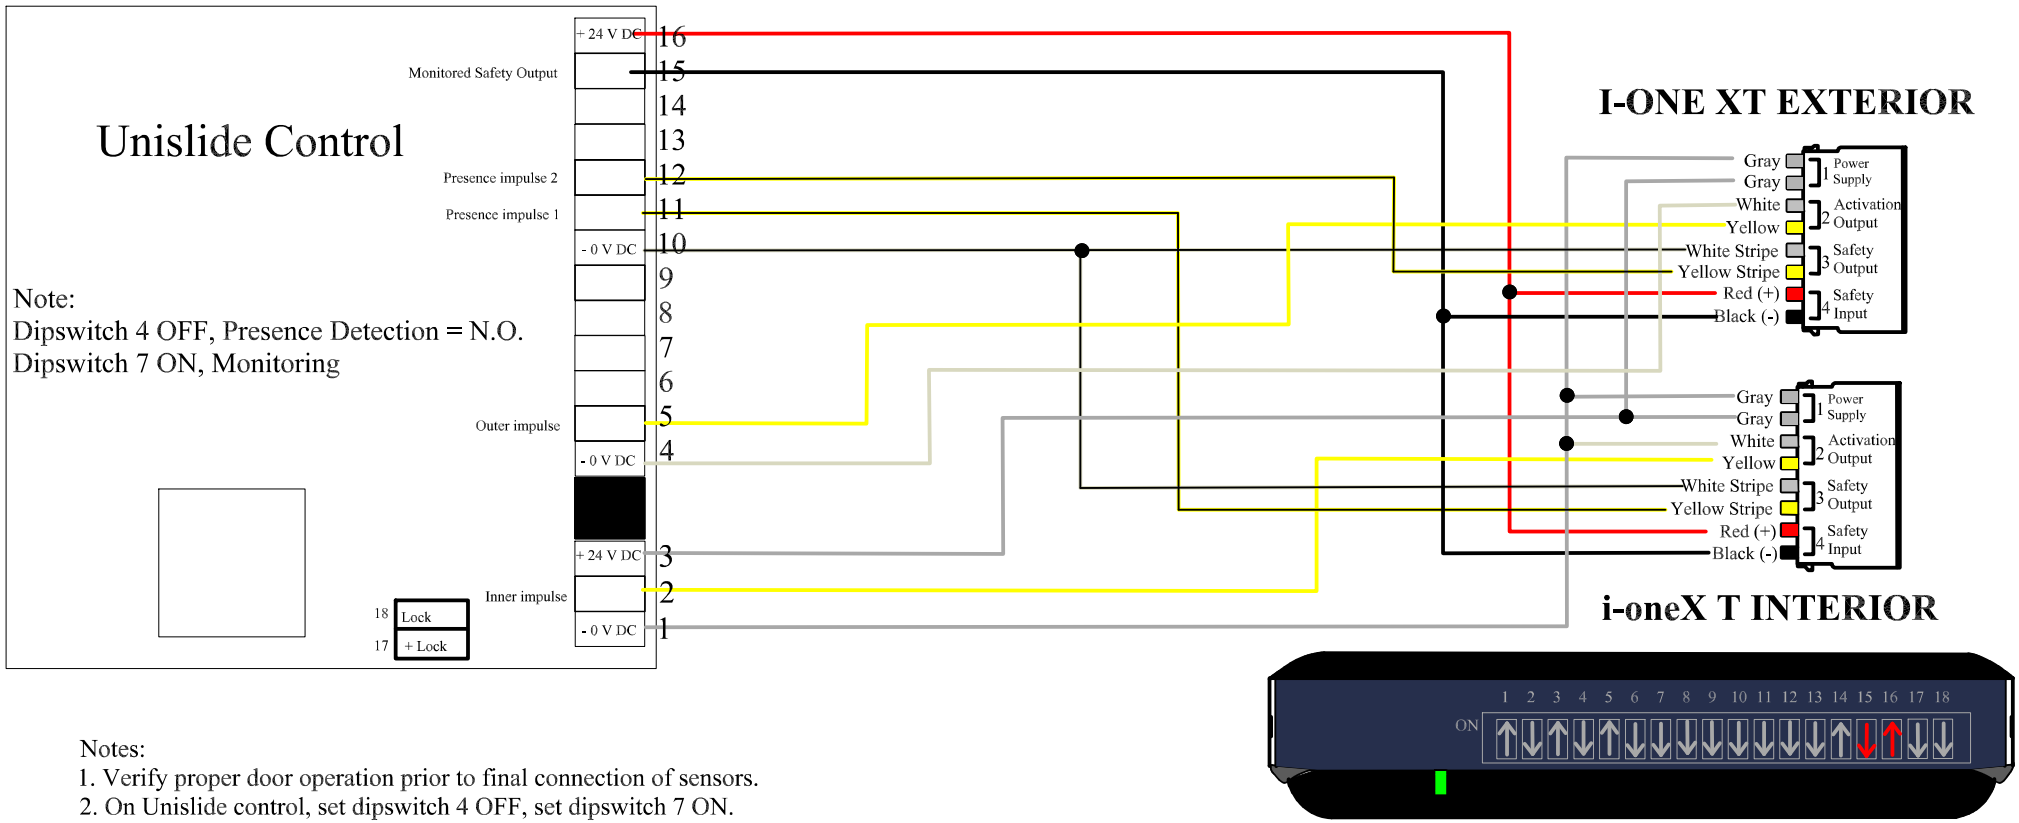

Notes:
1. Verify proper door operation prior to final connection of sensors.
2. On Unislide control, set dipswitch 4 OFF, set dipswitch 7 ON.
3. i-oneX T dipswicth 15 must be OFF (down) & dipswitch 16 ON (up) for proper monitoring operation.
4. Technician must perform a field test to verify substantial compliance with ANSI/BHMA A156.10 Section 8.

Title: 16300140 ASSA ABLOY UniSlide with i-oneX T		**Drawing #** 16300140
Drawing By: JCK	**Date:** 5/9/16	**Sheet:** 1 of 1

OPTEX Technologies Inc.
18730 S. Wilmington Ave. Unit 100
Rancho Dominguez, CA. 90220
800-877-6656 FAX 310-898-1098